



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

CUBE MC

FEATURES

- MULTI-USER MANAGEMENT
- ALL-IN-ONE EQUIPMENT
- COMPACT DESIGN
- COMPATIBLE WITH SSM AGILIS SOFTWARE
- SUCTION FILTER
- IP55

The PIUSI CUBE MC is the upgraded version of the world famous CUBE dispenser equipped with an electronic panel able to manage up to 250 users and 255 transactions. The sturdy structure includes a self-priming vane pump, built-in bypass, automatic nozzle, and integrated nozzle holder with start/stop pump lever.

PERFORMANCE

UP TO
70 L/MIN

FLOW RATE

AC/DC

VOLTAGE

± 0,5%

ACCURACY

UP TO
250

USERS

Upgrade your
MC hardware to B.SMART with
KIT UPGRADE 1.0/2018.



CUBE 70 MC



CUBE 70 MC WITH PEDESTAL (OPTIONAL)

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
FO059415D	25	55	400X400X460	-	1	12	24
FO059400E	25	55	400X400X460	-	1	12	24
FO059413D	25	55	400X400X460	-	1	12	24



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI



ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

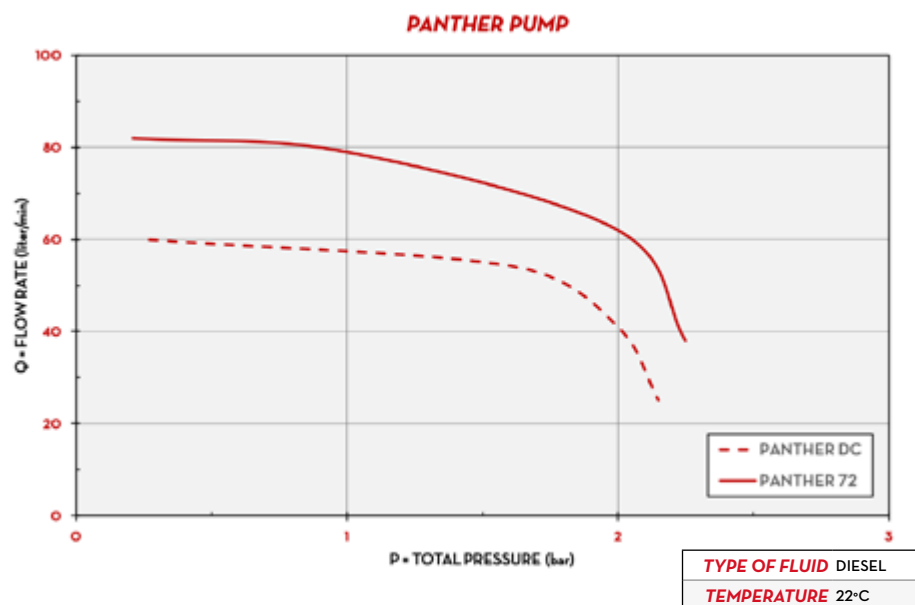

DIMENSIONS

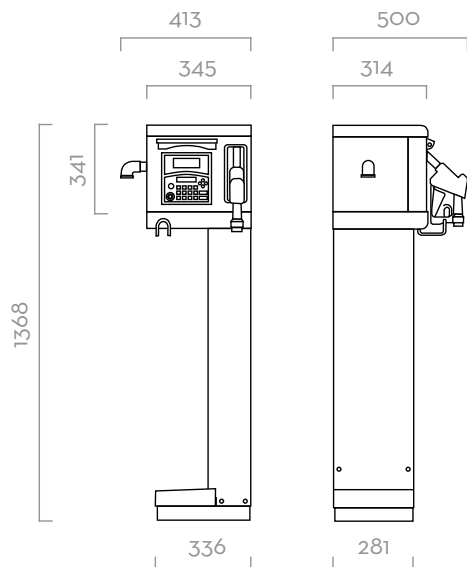

Dimensions expressed in millimeters

IN THE BOX

- CUBE MC DISPENSER
- AUTOMATIC NOZZLE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS



SHUTTER



DRIVER KEY (not included)



DATA TRANSFER AGILIS



SSM AGILIS SOFTWARE

MATERIALS

- PUMPS:
PANTHER AC
PANTHER DC
- METER:
K600/3
- NOZZLE:
AUTOMATIC NOZZLE

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER	INLET	HOSE		PC		USERS
			L/MIN	GPM	AC V/HZ	DC VOLT	POWER WATT	AMP. MAX.					LENGTH	Ø	CONNECTION	N.	
FO059415D	CUBE 70 MC 230V/50HZ 250U AGILIS	D	70	18	230/50		800	3.9	PANTH 72	K600	A60	NO	1"	4M	1"	YES	250
FO059400E	CUBE 70 MC 230V/50HZ 80U AGILIS	D	70	18	230/50		800	3.9	PANTH 72	K600	A60	NO	1"	4M	1"	YES	80
FO059413D	CUBE 70 MC 12V 80U AGILIS	D	60	15	12		420	35	PANTH DC	K600	A60	NO	1"	4M	1"	YES	80

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY